

# ACCESS FLOOR FINISHES

## INNOVATIONS IN ACCESS FLOORING





# ENGINEERED FOR EXCELLENCE. BUILT TO LAST.


Built on a legacy of innovation, quality, and performance, ASM has been providing premium flooring solutions for decades. Every product is backed by rigorous testing and stringent quality control, ensuring exceptional durability, reliability, and aesthetic appeal. Trusted by architects, designers, contractors, distributors, and installers, ASM offers a comprehensive range of floor finishes to suit every application—from heavy-duty industrial environments to controlled spaces requiring specialized performance. Whatever your project, ASM delivers flooring solutions that combine lasting quality with outstanding results.

## CONTENTS

- 1 Contents
- 3-5 High Pressure Laminate Tiles
- 6-7 VPT Conductive Tiles: Contile™ & StatTile™
- 8-9 Rubber Tiles: Antistatic & Standard
- 10-19 Specialty Tiles



**Porcelain**

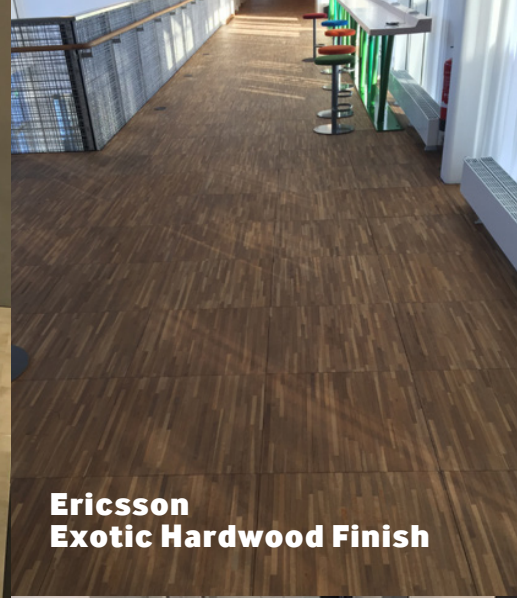

**Ericsson  
Exotic Hardwood Finish**



**Acterna VPT**

**DESIGNED  
SPECIFICALLY  
FOR  
RAISED  
ACCESS  
FLOORS**










**Wood  
High Pressure Laminate**




**Ericsson  
VPT**

# HIGH PRESSURE LAMINATE & SOLID FINISHES

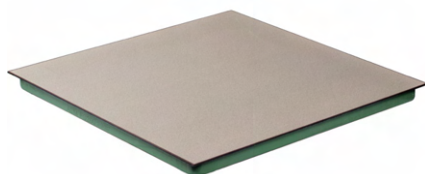

- 20% better wear surface results than competition
- Revolutionary trim that is printed into the laminate under the high wear finish
- No routing or removal of high wear surface
- No exposed paper core to absorb dirt and moisture
- No recess or step down
- Reduces chipping and caster noise.
- Eliminates dirt trap
- No surface applied paint or inks - cannot wear off

# SMART - TRIM

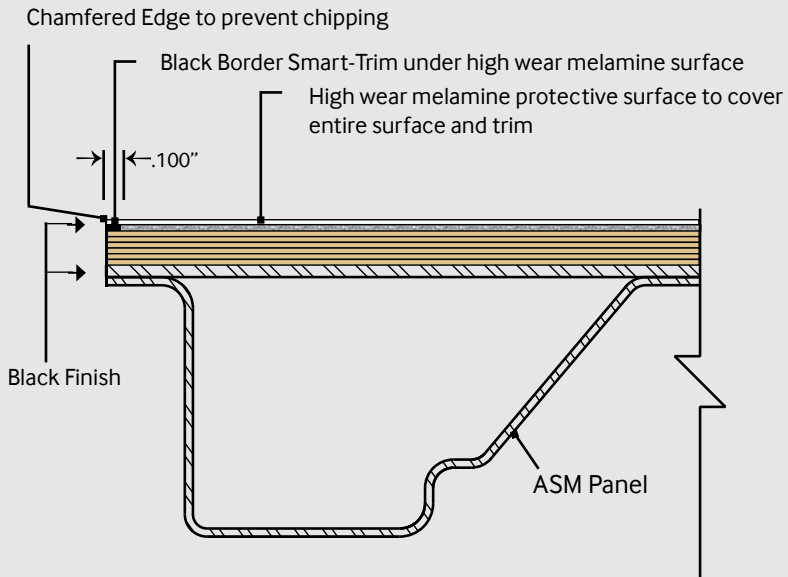

## Innovations in Access Flooring

### ASM Laminate Performance Specifications

| Properties                  | NEMA Test Method | NEMA Standard | ASM Laminate Results                   |
|-----------------------------|------------------|---------------|----------------------------------------|
| Electrical Resistance       | NFPA 99          | -             | $1.0 \times 10^6 - 2.0 \times 10^{10}$ |
| Stain Resistance            | 3.4              | No Effect     | No Effect                              |
| Boiling Water Resistance    | 3.5              | No Effect     | No Effect                              |
| High Temperature Resistance | 3.6              | Slight Effect | No Effect                              |
| Wear Resistance             | 3.13             | 300 cycles/mm | 3000+                                  |
| Scuff Resistance            | 3.16             | No Effect     | No Effect                              |


# VINYL PLASTIC TECHNOLOGIES

VPT uses a process to ensure the conductive elements are distributed evenly through the entire tile thickness. This, along with the finest materials, ensures a lifetime of consistent conductivity regardless of wear. VPT carries a lifetime conductivity warranty. VPT has a superior polished finish that does not require special treatments or waxes to maintain conductivity or appearance. VPT has 12 colors to meet the needs of the most discerning designers.

VPT is resistant to very strong chemicals.

- Acids
- Strong alkalis
- Alcohols
- Aromatic solvents
- Aliphatic Solvents


# CONTILE & STATTILE




SJ-9301




SJ-9302




SJ-9303




SJ-9305




SJ-9306




SJ-9603




HC-0501




HC-0503




HC-0506



HC-0509



HC-0510



HC-0511




# VPT

VPT conductive flooring controls static electricity in sensitive areas, helping prevent damage to electronics and loss of important data.

There are also some cases of inadvertent ignition of inflammable and explosive substances caused by static discharge.

When two objects with electrostatic charge come into contact or friction, electron movement occurs with electrification to positive and negative poles which are stationary at the points of mutual contact, a direct action against these points will cause instantaneous electric discharge, the result being damage to products, pollution or malfunction. Because of this, both UL and NFPA strongly recommend the use of conductive floor coverings.

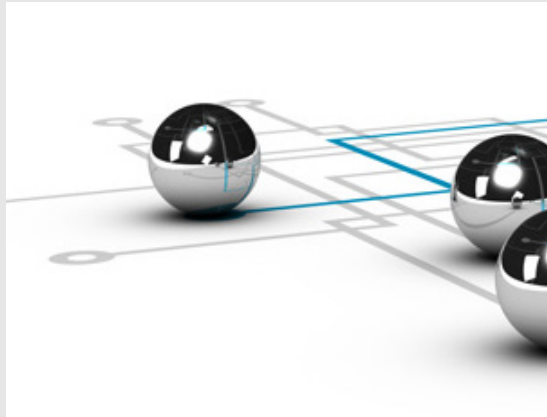

## VPT IS RECOMMENDED IN

- Electronic manufacturing facilities
- Computer/server rooms
- Clean rooms
- Assembly factories
- Telecommunication rooms
- Health care laboratories

| Performance                 | Conductive                                   | Static Dissipative              |
|-----------------------------|----------------------------------------------|---------------------------------|
| Resistance: point to ground | $2.5 \times 10^4$ to $10^6 \Omega$           | $10^6$ to $10^8 \Omega$         |
| Resistance: point to point  | $2.5 \times 10^4$ to $10^6$ to $10^6 \Omega$ |                                 |
| Static decay                | 5000 to 0 volts in $< 0.01$ sec.             | 5000 to 0 volts in $< 0.2$ sec. |


# ANTI-STATIC RUBBER TILE

## Rubber Properties

- Highly wear-resistant
- Extreme long life
- Dirt-Repellent
- Cost-efficient maintenance
- No seal or finish to maintain
- High degree of fire-resistance
- Excellent sound absorption properties
- Joint-sealing not necessary

## Special Properties

- Electrostatic dissipative
- Suitable for fork lift trucks
- Safe in fire-toxicological terms
- Resistant to oils and greases
- Extremely impact-resistant

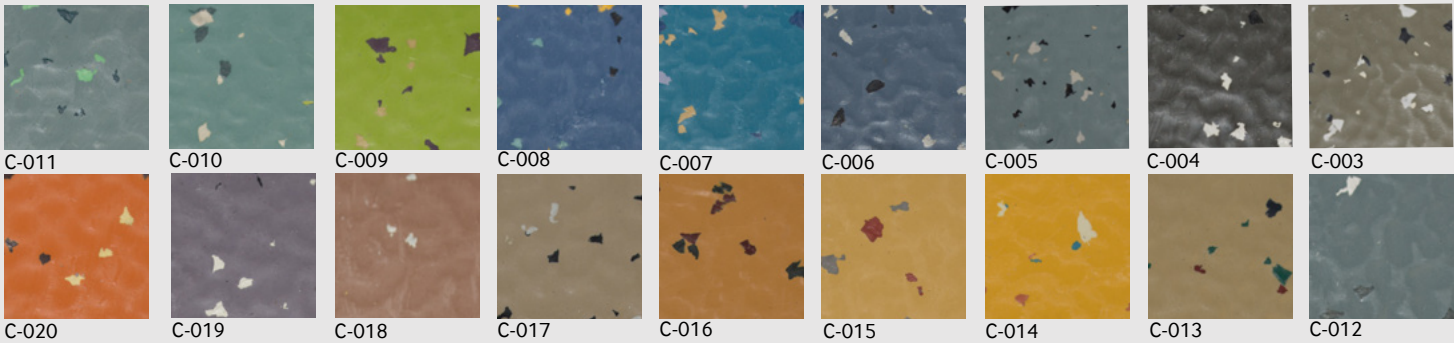


Available in a hammered finish or smooth finish

# STANDARD RUBBER TILE

## Electrostatic Protection

- Static generation less than 20 volts per AATCC-134
- Easy to maintain - no conductive wax necessary
- Chemical and hot solder resistant
- Resistant to most oils and grease
- Ultra low vibration
- Outgassing according to ASTM-E-595-84 VCM less than 1.2%

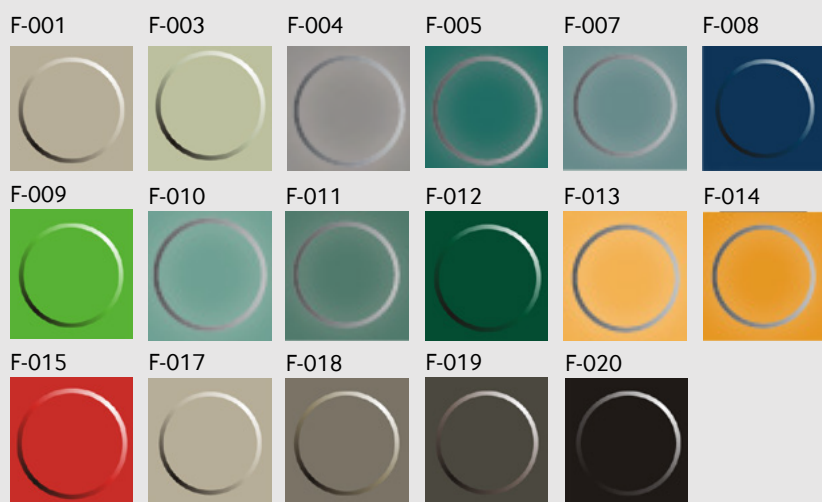

- Data Centers
- Health care facilities
- Industrial buildings
- High traffic public venues
- Leisure facilities
- Airports and terminals
- Schools and institutions
- Office buildings

| Test                                       | Average Results          |
|--------------------------------------------|--------------------------|
| Length & Width Size Deviation              | ± 0.1%                   |
| Diagonal Corners Squareness Deviation      | ≥ 0.008" (0.20 mm)       |
| Hardness Shore "A" Durometer               | > 85                     |
| Tensile-Strength                           | > 1450 psi (10 Mpa)      |
| Bending Resistance (3/4" metal rod)        | No Effect                |
| Peeling Strength                           | ≥ 5620 lbf/in (25 kN/mm) |
| Wear Resistance (mm/5N) Roller Type        | ≤ 150                    |
| Thermal Stability (dimensional change)     | ≤ ± 0.4%                 |
| Fire Resistance                            | Yes                      |
| Resistance to Cigarette Burns              | Third Degree             |
| Resistance to Chemicals (carbon black ink) | No Visible Change        |
| Electrical Properties Volume Resistance    | ≥ 10 <sup>10</sup> Ω     |
| Light Resistance                           | Third Degree             |
| Brittleness Temperature                    | ≤ 5° F (-15° C)          |
| Indentation Residual Level                 | ≤ 0.010" (0.25 mm)       |


# LUXURY VINYL

Low-maintenance floor that takes on traffic and spills. Vinyl flooring lets you transform any area with gorgeously realistic and durable designs.




HL-PVC01C


HL-PVC02C




HL-PVC01D




HL-PVC02D




HL-PVC03D




HL-PVC03C



HL-PVC04C



HL-PVC04D




HL-PVC05D



HL-PVC06D



HL-PVC05C



HL-PVC06C

- Office Buildings
- Lobby & Reception Areas
- Board Rooms
- Corridors
- Administrative Offices
- Sales Offices
- Airports

# PORCELAIN FINISH

Versatile and elegant, porcelain floor tiles are innovative products that is gaining popularity among builders.



Spyscape Museum NYC  
Porcelain Tile



HL-CT01



HL-CT02



HL-CT03



HL-CT04



HL-CT05



HL-CT06

- Office Buildings
- Lobby & Reception Areas
- Board Rooms
- Corridors
- Administrative Offices
- Sales Offices
- Airports


\* NOTE: CA200 PANEL SERIES - CONTACT YOUR SALES REPRESENTATIVE FOR DETAILS

## BEAUTIFULLY SELECTED PORCELAIN






HL-MT01




HL-MT02




HL-MT03



HL-MT04



HL-MT05



HL-MT06

# NATURAL MARBLE FINISH


Marble tile is a natural floor surface well known beauty, style, and elegance. Instantly elevate the appearance of your space.

## APPLICATIONS

- Office Buildings
- Lobby & Reception Areas
- Board Rooms
- Corridors
- Administrative Offices
- Sales Offices
- Airports




# NATURAL GRANITE FINISH




HL-ST01




HL-ST02




HL-ST03



HL-ST04



HL-ST05



HL-ST06


## APPLICATIONS

- Office Buildings
- Lobby & Reception Areas
- Board Rooms
- Corridors
- Administrative Offices
- Sales Offices
- Airports




# HARDWOOD


- Office Buildings
- Lobby & Reception Areas
- Board Rooms
- Corridors
- Administrative Offices
- Sales Offices
- Airports

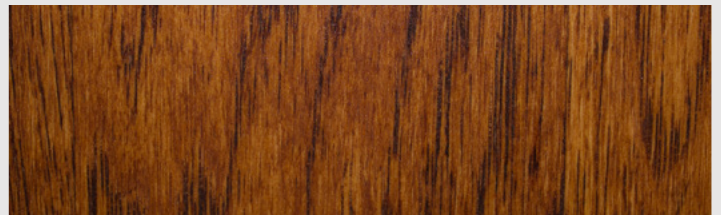


HL-WDS03

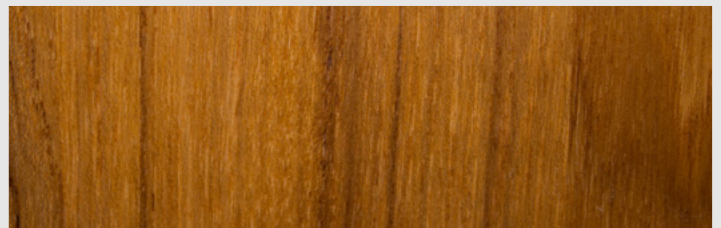


HL-WDS04

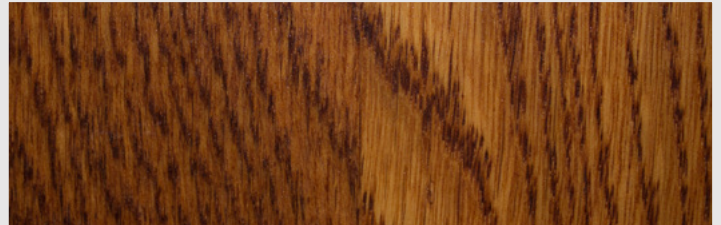


HL-WDS05

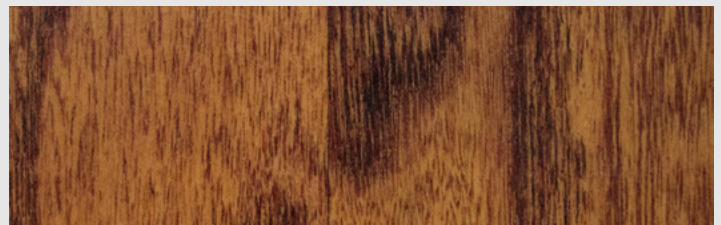

HL-WDS06

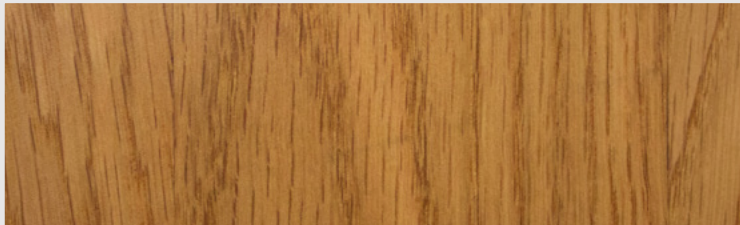

HL-WDS01

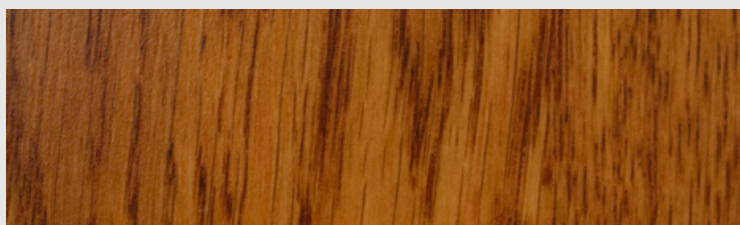

HL-WDS02


# WOOD GRAIN HIGH PRESSURE LAMINATE

Add warmth to your interior with wood grain high pressure laminates. ASM's wood grain high pressure laminate is the surface solution for high-use applications in offices, lobbies/reception areas, educational institutions, sales offices, board rooms, and more.




Light Beech

3023




Cherry Wood

3201



Yellow Walnut

3202



Grey Cherry

3203




Light Cherry

3045


# TERRAZZO

- Office Buildings
- Lobby & Reception Areas
- Board Rooms
- Corridors
- Administrative Offices
- Sales Offices
- Airports


With its classic look, durability, and low maintenance, Terrazzo is a great selection for your next project.




T-102




T-103



T-181




T-182




T-183




T-803



T-194



T-193



T-192



T-191



No matter what your architectural requirements, style or budget, ASM can provide the answer to your flooring challenges. Use of this tile is environmentally clean and prevents off gassing for a healthy work environment and helps contribute towards LEEDS. ASM incorporates a wide range of naturals and composites in its repertory of tile materials.

Whether you need the elegant glamour of stone, warmth of wood, or the color impact of solid vinyl, ASM has a finish for you.

Today's construction typically requires technical properties exceeding the traditional boundaries of aesthetics and durability.

The work environment of the present and future demand a sensitivity to instrumentation: building finishes that have been engineered to create a safe environment for electronics and equipment. Unparalleled engineering and quality control, innovative materials to accommodate today's refined design trends.

For more information:

**ASM Modular Systems, Inc.**

**(843) 534-1110**

[www.asmproducts.com](http://www.asmproducts.com)




## SPECIALTY FLOORS



## COMMERCIAL FLOORING SOLUTIONS

[www.asmproducts.com](http://www.asmproducts.com)

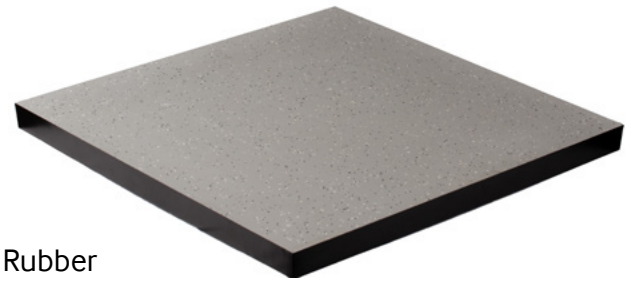

Rubber



Terrazzo



CS-Wood



Granite



Marble



Exotic Wood



Luxury Vinyl



Porcelain

**LAMINATES**

**WOODS**

**PORCELAIN**

**MARBLE**

**RUBBER**

**ESD & LUXURY VINYL**

**HPL**

**GRANITE**

**EXOTIC HARDWOOD**

**TERRAZZO**



Contact one of our Flooring Specialists:

Ph: 843-534-1110

Fax: 843-534-1111

Email: [info@asmproducts.com](mailto:info@asmproducts.com)

Website: [www.asmproducts.com](http://www.asmproducts.com)

Location:

9500 Industrial Center Drive

Ladson, SC 29456

**ASM is a member of:**



2026|08