


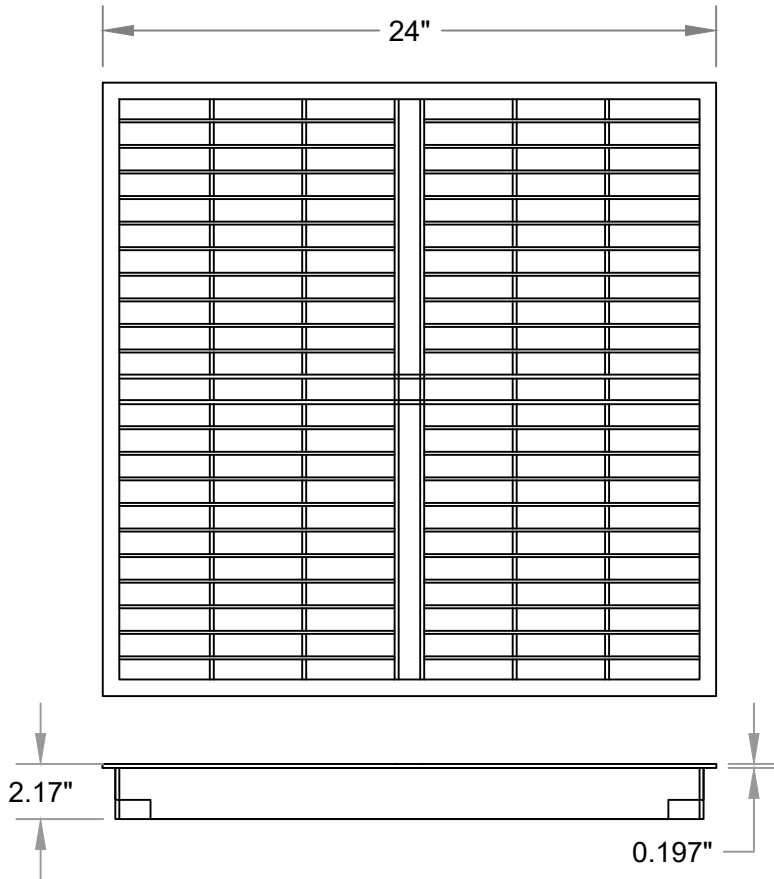

PHYSICAL DATA

- Weight of panel: 38 lb.
- 70% open area
- Fire rating of bare panel:
Class A Flame Spread
Non-Combustible Materials

PERFORMANCE DATA

- Concentrated Load rating: 2500 lbf (11.12 kN)
- Ultimate Load rating: 5000 lbf (22.24 kN)
- Safety Factor: 2-to-1 Min.

UNDERSTRUCTURE OPTIONS

- Rigid Grid bolted stringers:
2' x 2' system
2' x 4' system
4' x 4' Basketweave system

FEATURES

- 70% open area for high-volume air flow
- Available in 24" or 600 mm size
- Completely interchangeable with FSD series and SD-series panel systems
- Welded steel construction
- Hammertone grey epoxy powder coat paint finish

Static Pressure (In. H ₂ O)	No Damper (CFM)
0.02	1465
0.04	1907
0.05	2103
0.06	2290
0.08	2664
0.10	3038
Note: Values above 2500 CFM have been estimated because they exceed airflow hood test capacity.	

AIRFLOW PERFORMANCE INFORMATION