



PARTIAL TOP VIEW

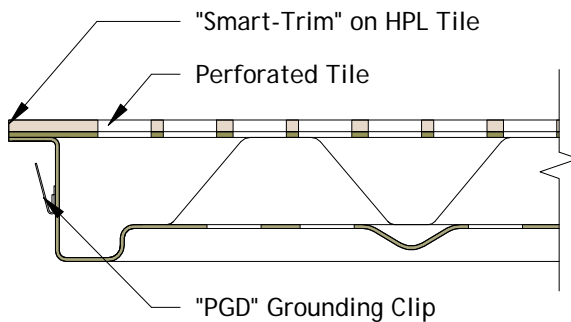

PARTIAL SIDE VIEW

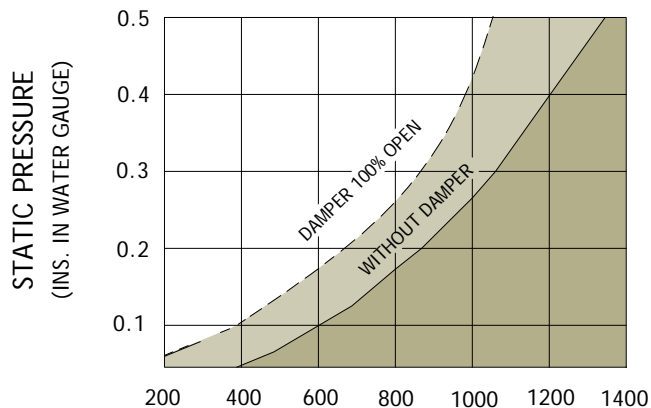

VOLUME OF AIR FLOW (C.F.M.)

PHYSICAL DATA

- Weight of Bare Panel: 17 lb.
- Open Area: 25%
- Fire Rating of Bare Panel:
 - Class A Flame Spread
 - Non-Combustible Materials

PERFORMANCE DATA

- Concentrated Load Rating: 1,000 lbf (4.45 kN)
- Uniform Load Rating: 400 psf (1952 kg/m²)
- Ultimate Load Rating: 3,200 lbf (14.23 kN)
 - Safety Factor: 3-to-1 Min.
- Impact Load Rating: 175 lb. (79 Kg)
- Rolling Load Rating:
 - Cisca Wheel A (10 Pass): 400 lbf (1.78 kN)
 - Cisca Wheel B (10K Pass): 400 lbf (1.78 kN)

FINISH OPTIONS

- HPL Tile (1/16" or 1/8"):
 - ASM "Smart-Trim", "Dura-Trim", or "Mono"
- Vinyl Tile:
 - VPT "Con-Tile" (Static Conductive)
 - VPT "Stat-Tile" (Static Dissipative)
- Bare Surface

UNDERSTRUCTURE OPTIONS

- Free Standing - Stringerless
- Rigid Grid Bolted Stringers
 - 2' x 2' System
 - 2' x 4' System
 - 4' x 4' Basketweave System

FEATURES

- 25% Open Area for Air Flow
- Available in 24" or 600mm Size
- Available with Top-Adjusting Slide Dampers
- Completely Interchangeable with FS-Series and S-Series Panel Systems
- Powder Coat Epoxy Paint Finish
- Full-Strength, Deep Drawn Corners
- Recycled Material Content = 42.3%

NOTE: DATA SHEET DRAWING AND INFORMATION ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.