



TILE COVERED
CORNER-LOCK PANEL

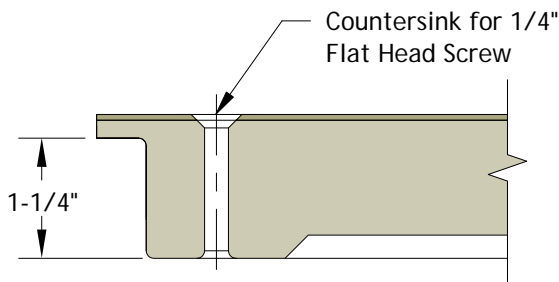

BARE CORNER-LOCK PANEL

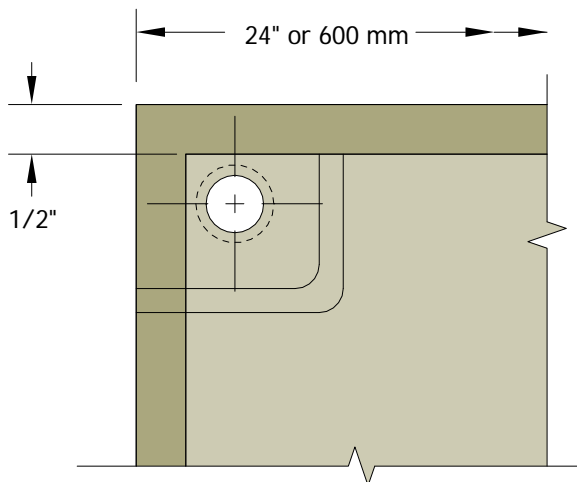

PARTIAL BOTTOM VIEW

PHYSICAL DATA

- Weight of Bare Panel: 72 lb.
- Height of Bare Panel: Varies
- Fire Rating of Bare Panel:
 - Class A Flame Spread
 - Non-Combustible Materials

PERFORMANCE DATA

- Concentrated Load Rating: 8,000 lbf (35.59 kN)
- Uniform Load Rating: 2,500 psf (12,202 kg/m²)
- Ultimate Load Rating: 20,000 lbf (88.97 kN)
 - Safety Factor: 2.5-to-1 Min.
- Impact Load Rating: 1,000 lb. (454 Kg)
- Rolling Load Rating:
 - Cisca Wheel C (10 Pass): 8,000 lbf (35.59 kN)

FINISH OPTIONS

- HPL Tile (1/16" or 1/8"):
 - ASM "Smart-Trim", "Dura-Trim", or "Mono"
- Vinyl Tile:
 - VPT "Con-Tile" (Static Conductive)
 - VPT "Stat-Tile" (Static Dissipative)
- RubberTile:
 - Antistatic
 - Standard
- Bare Surface
- Corner-Lock (Bare or with Tile)

UNDERSTRUCTURE OPTIONS

- Corner-Bolted
- Rigid Grid Bolted Stringers
 - 2' x 2' System
 - 2' x 4' System
 - 4' x 4' Basketweave System
- Pedestals are sized to suit application

FEATURES

- Available in 24" or 600mm Size
- Epoxy Paint or Mill Finish
- Recycled Material Content = 100%

NOTE: DATA SHEET DRAWING AND INFORMATION ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.