


PLAN VIEW

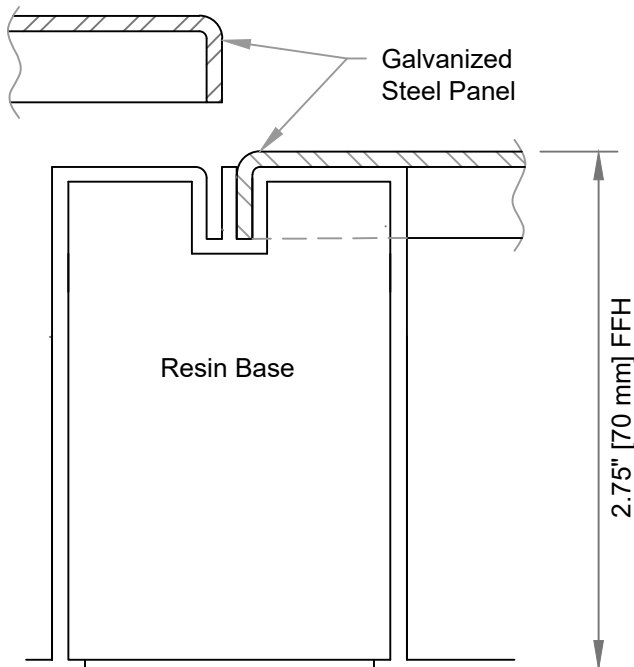

SIDE VIEW

### PHYSICAL DATA

- Weight of System - 4 psf (19.5 kg/m<sup>2</sup>)
- Height of System - 2.75" (70 mm)

### PERFORMANCE DATA

- Concentrated Live Load - 2,000 lbf (8.90 kN)  
Per IBC Table 1607.1
- Concentrated Point Load - 500 lbf (2.22 kN)  
Per CISCA Test Procedures, Section 1
- Uniform Live Load - 2,000 lbf (8.90 kN)  
Per IBC Table 1607.1
- Ultimate Load Safety Factor - 2-to-1 Min.  
Per CISCA Test Procedures, Section 2
- Rolling Loads - 10 Pass  
CISCA Wheel A (3" Dia.) - 460 lb.  
8" Dia. x 2" Semi-Pneumatic - 500 lb.

### FINISH OPTIONS

- Bare surface galvanized steel

### FEATURES

- Available at 2.75" (70 mm) FFH
- Prefabricated before shipment
- Easy to install
- Heavy-Duty quick-connect steel plates
- Easy to change layout and cable wiring
- No adhesive required
- No underlayment required
- No fasteners required